



| | |
|---------------------|---|
| Product line | Flexi line 2G |
| Collection | ELEGANCE 2G |
| Code | Depending on configuration – see code chart for details |


| | STANDARD CONFIGURATION | OPTIONAL CONFIGURATION |
|----------------------------|---|--|
| Outlet pump* | MAC 11 (DC power: 12V- 24 V) | MAC11 (AC power: 220-240 V 50 or 60 Hz / -110-125V 60Hz) |
| Seat & Cover | Wooden Polyester | Wooden polyester with soft closing / Thermosetting with soft closing system |
| Color | White | Bone, Black |
| Control Panel | All-in-one (1-2 buttons)  | Multiframe (1 - 2 buttons) / Argent(1-2 buttons) / Touch (1 - 2 buttons)  Premium (smart flush software) / Premium Touch (smart flush sw) |
| Water inlet device* | Solenoid (centralized fresh water system) | Inlet pump (single raw water system) |
| Bidet | | - Matching bidet : BIDET ELEGANCE 2G - Integrated bidet spray nozzle function with side mounted faucet |
| Water consumption | 0.5 / 2.7 l (0.1-0.7 gal) per flush. The user can easily adjust the water amount. | |
| Weight | 22.5 Kg (49.6 lb) (fully assembled) | |


*see technical data for details


Technical data:


| WIRE GAUGE SIZE CHART | | |
|----------------------------------|--------------------------------|--------------------------------|
| Distance from source* is: | | |
| | 1-2 m | > 2m |
| 12V DC | 11 AWG (4.17 mm ²) | 9 AWG (6.63 mm ²) |
| 24V DC | 13 AWG (2.63 mm ²) | 11 AWG (4.17 mm ²) |
| 110-125V AC 60Hz | 18 AWG (0.82 mm ²) | 18 AWG (0.82 mm ²) |
| 220-240V AC 50Hz or 60 Hz | 18 AWG (0.82 mm ²) | 18 AWG (0.82 mm ²) |

*Distance measured assumed power and ground wires

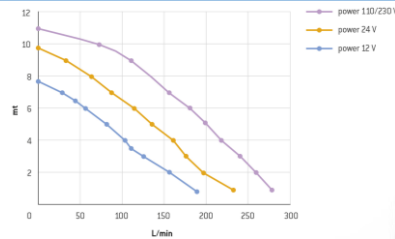

| MAC 11 | OUTLET PUMP | 12V DC | 24V DC | 110-125V AC 60Hz | 220-240V AC 50Hz or 60 Hz |
|---|-------------|--|--------|------------------|---------------------------|
|  | | | | | |
| Fuse recommended | | 40A | 30A | 8A | 5A |
| Pump performance | | Max 270L/min 71.3 gpm Max vertical head 11mt 36.1 ft Max horizontal distance 90 mt 295.3 ft | | | |
| Outlet Duck bill valve (male) | | 1.5" / required ID 1.5" (38.5 mm) | | | |

| INLET SOLENOID Centralized system | 12V DC | 24V DC | 110-125V AC 60Hz | 220-240V AC 50Hz or 60 Hz |
|---|--------|--------|------------------|---------------------------|
|  | | | | |
| Power consumption | 9.5 W | 10 W | 6 W | 6 W |
| Working pressure recommended | 3 bar | 3 bar | 3 bar | 3 bar |
| Solenoid Inlet and Outlet (threaded female) | 1/2" | | | |
| Toilet inlet hose fitting (barbed) | 1/2" | | | |

| INLET PUMP Single system (Raw water) | 12V DC | 24V DC |
|---|--------------------------|--------|
|  | | |
| Fuse | 8 A | 4 A |
| Pressure | 45 PSI - 3 bar | |
| Water flow | 12 l/min 3.17 gmp | |
| Toilet inlet hose fitting (barbed) | 1/2" | |

| | |
|---------------------------------|---|
| Notes: | For versions with integrated bidet function: 3/8" female connection for cold and hot water supply |
| Box dimension | 67cm x 50 cm x 75 cm (LxWxH) |
| Packaging (units/pallet) | 12 |